


8 7 6 5 4 3 2 1

SPECIFICATION CONTROL DRAWING

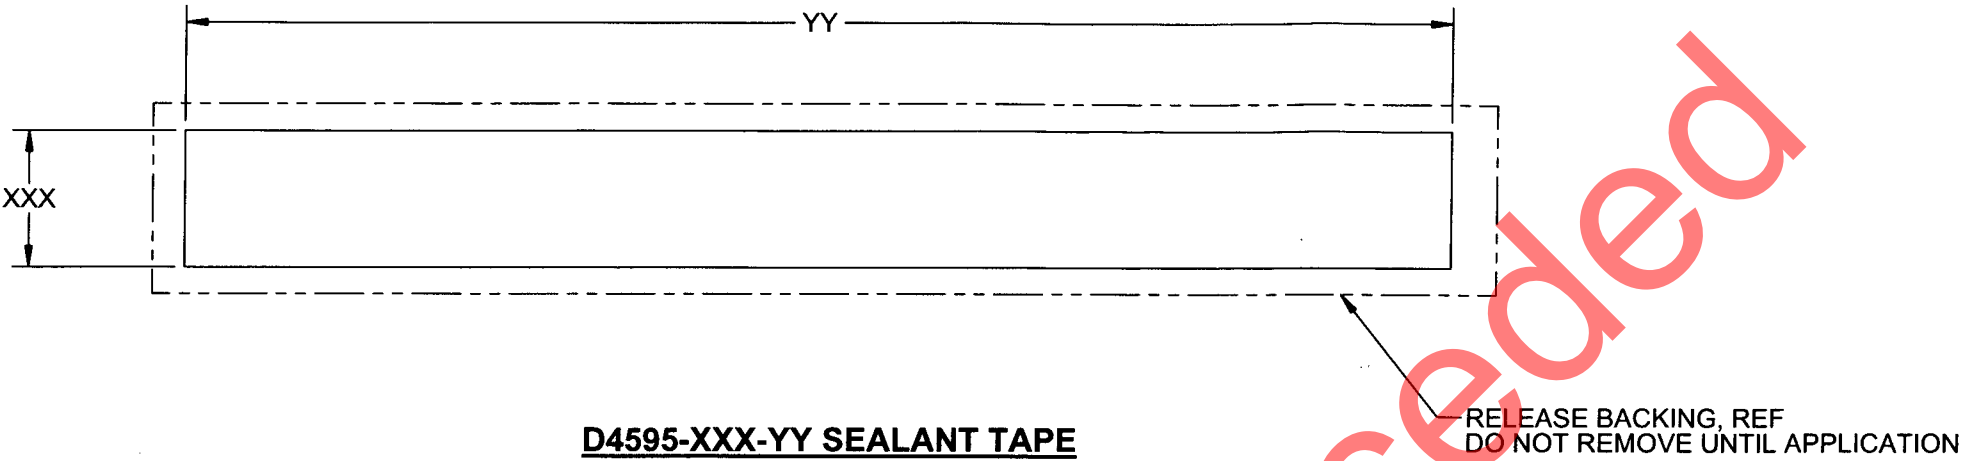

- NOTES:
- 1) MATERIAL: SEALANT TAPE, SINGLE-COMPONENT, NON-CURING, POLYSULFIDE BASE
1/16" THICK
PER MIL-S-11030F TYPE III
POSSIBLE SUPPLIER = GENERAL SEALANTS INC. P/N GS#424 (AVIALL)
- 2) SPECIFICATION: D4595-XXX-YY
WHERE "XXX" = WIDTH IN HUNDREDTHS OF AN INCH
AND "YY" = LENGTH IN FEET
EG. 1 INCH WIDE BY 25 FEET LONG SEALANT TAPE = D4595-100-25
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: N/A
- 6) IDENTIFICATION: IDENTIFY WITH DART P/N "D4595-XXX-YY", B/N, AND EXPIRATION DATE "EXPIRATION dd-MMM-yyyy" (EG. 26-SEP-2012)
PER DART QSI 044 6.1
- 7) WEIGHT: 0.33 lbs/sq.ft

RELEASED
2012-02-16
WP

A	NEW ISSUE	CP	12.01.09
REV.	DESCRIPTION	BY	DATE
DESIGN	GP	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	GP		
CHECKED	ASS	DRAWING NO.	REV. A
MFG. APPR.	ES	D4595	SHEET 1 OF 1
APPROVED	WP	TITLE	SCALE
DE APPR.	JP	SEALANT TAPE	NTS
DATE	12.01.09	COPYRIGHT © 2012 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	